

Northeast roll-off rectangular container (C&D 30 yd shown)

Components precision cut by laser



SIDES

- 12 GA Sides
- 1 pc 3"x4" tube top rail
- Heavy duty side posts with 4-way bend on 24" OC
- 1-1/4" flat bar tarp strap

FLOOR

- 3" Structural channel on 16" spacing cross members
- Fully welded 3x4 tubing in floor under tailgate
- 3/16" Main rail, 2x6 tubing 1 piece
- 4"x6" Nose rollers
- 8"x6" Greaseable ground rollers (front)
- 8"x10" Greaseable ground rollers (rear)
- C&D-3" Structural channel on 14" spacing cross members
- C&D-1/4" Main rail, 2"x6" tubing 1 piece

TAILGATE

- 3"x4" Vertical structural tubing
- Formed heavy duty horizontal channels
- 2 Heavy duty: greaseable hinges, and HD greaseable latches with enclosed safety latch system
- 40 yd has 3 greaseable hinges
- C&D-3 Heavy duty: greaseable hinges and 3 HD greaseable latches with enclosed safety latch system

FRONT

- Interlocked 1-1/2" hook robotically welded through a 1" hook plate
- Formed vertical uprights & horizontal push plates
- Laser cut anti-slip ladder rungs standard



***NOTE: Items in red are unique to C&D model.**




Standard Colors Available

Safety Blue | Valve Dark Blue | Vogel Drak Gray | Tower Gray | Black | Packer Beige | Container Red

Rumpke Brown | Container Brown | Rumpke Green | Medium Green | Recycle Green | Best way Green

Unless stated otherwise in writing, container sizes indicated on sales literature, price lists, quotes, invoices, and delivery tickets are nominal sizes. The actual volume may vary from nominal sizes. All material dimensions stated are approximate.

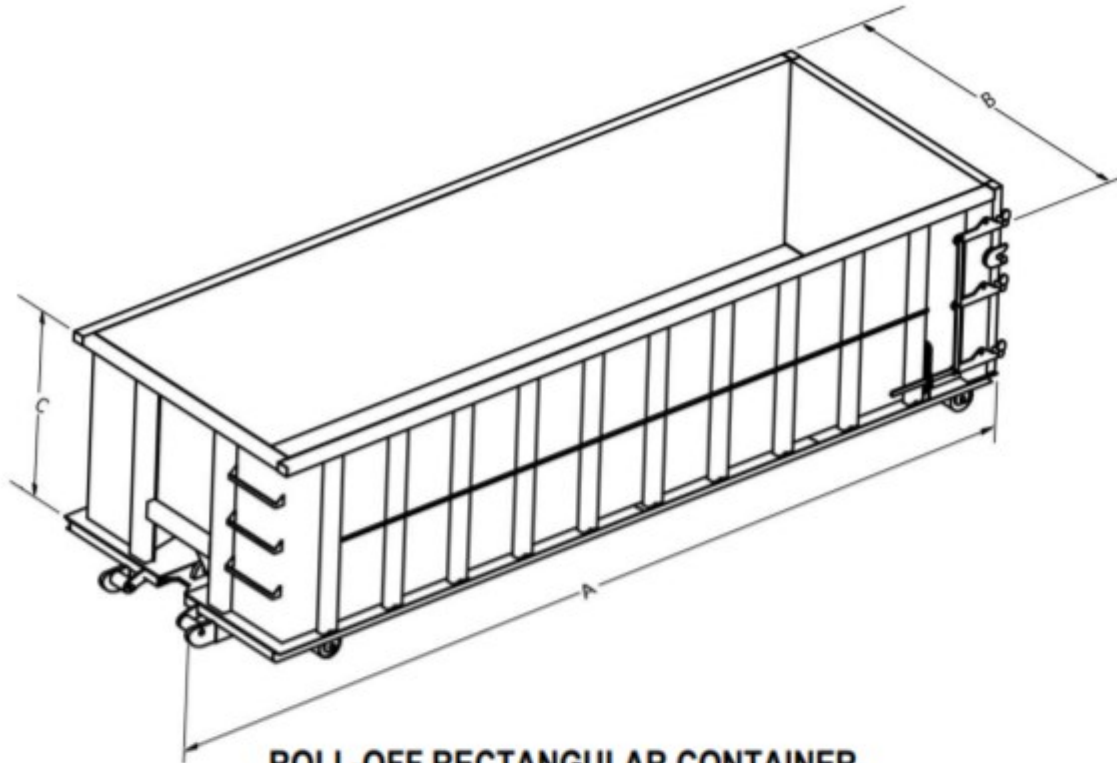

ROLL-OFF RECTANGULAR CONTAINER

CUBIC YARD CAPACITY	MODEL NUMBER	OVERALL LENGTH DIMENSION "A"	OVERALL WIDTH DIMENSION "B"	OVERALL HEIGHT DIMENSION "C"	WEIGHT C & D LISTED	QUANTITY PER LOAD
10	1242	157-1/2"	98"	52"	2920 LBS.	10
12	1248	157-1/2"	98"	58"	3210 LBS.	10
15	1261	157-1/2"	98"	71"	3500 LBS.	10
10	1432	181-1/2"	98"	42"	3450 LBS.	10
12	1442	181-1/2"	98"	52"	3500 LBS.	10
15	1448	181-1/2"	98"	58"	3550 LBS.	10
20	2242	277-1/2"	98"	52"	4490 LBS.	6
30	2261	277-1/2"	98"	71"	5190 LBS.	6
40	2282	277-1/2"	98"	92"	5908 LBS.	4

